

ARROW™ GHV


Designed to be installed in areas where flammable gases, vapors, or dusts are present in sufficient quantities to create a risk of explosion or fire.

CLASS I DIV. 2

CLASS II DIV. 1

CLASS II DIV. 2


CLASS III

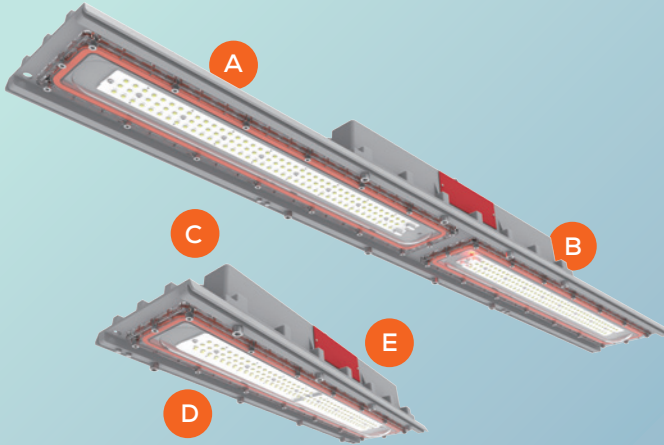

KEY FEATURES

- A LOW PROFILE AND LIGHTER.** 100mm fixture height, perfect for mounting in confined or low height areas.
- B SIMPLE INSTALLATION.** Clamshell design easy access to drivers and multiple entries standard for easy through wiring.
- C HIGH OUTPUT.** 2 models from 5,100 to 13,600 lumens with up to 170lm/W.
- D MULTIPLE BEAM ANGLES.** 30°, 60°, 90°, 110°, T2, T3, T4, different lens provide more choices for various scenarios.
- E EMERGENCY BATTERY BACK-UP.** 90-minutes minimum running time at 8W in emergency mode.

9 MOUNTING OPTIONS

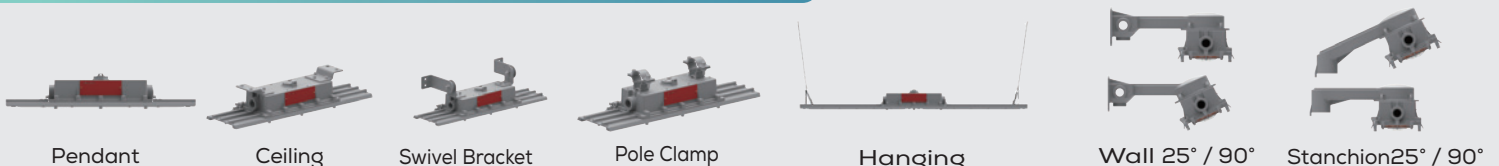

HAZLOC EMERGENCY LINEAR LIGHTING

CLASSIFICATIONS

NEC/CEC Standard

UL 844 Hazardous Locations
Class I Division 2, Group A, B, C, D
Class II Division 1, Group E, F, G
Class II Division 2, Group F, G
Class III
Class I, Zone 2, Group IIC
CSA C22.2 No.137
CSA C22.2 No.141
CSA C22.2 No.250.0:21
UL 924
UL 1598 Wet Locations
UL 1598A Marine Outside Type (Salt Water)
ABS, FCC
IP66/67 | IK10 | 5G | NEMA 4X

TECHNICAL DATA

ELECTRICAL & OPTICAL

Rated Power	30W / 40W / 45W / 60W / 80W
Input Voltage	120-277V/AC
Lumen Output	5,100lm ~ 13,600lm
Luminous Efficacy	170 lm/W
Beam Angle	30° / 60° / 90° / 110° / T2 / T3 / T4
Color Temperature	Amber/2700K/3000K/4000K/5000K
CRI	Ra>70

EMERGENCY OPTIONS

Emergency power	15W / 9W (cold weather)
Lumen Output	≥2,420lm ≥1,360lm (cold weather)
Recharging time	24 hours
Battery Backup Runtime	≥90 mins

ENVIRONMENTAL & TECHNICAL

Ambient Temperature	0°C~+50°C -20°C~+50°C (Cold weather)
Lens Material	Polycarbonate
Mounting Options	Pendant / Ceiling / Wall mount / Stanchion / U-Bracket
Cable Entries	3/4" NPT, 1-1/4" NPT, 1-1/2" NPT

OPTIONS AND WARRANTY

- Safety cable
- 10kV surge protector is standard, 20kV is optional
- 1-10V dimming capabilities
- L70 > 150,000 operation hours @ 25°C
- 5-year limited system warranty