

ARROW™ GHLV


Designed to be installed in areas where flammable gases, vapors, or dusts are present in sufficient quantities to create a risk of explosion or fire.

CLASS I DIV. 2

CLASS II DIV. 1

CLASS II DIV. 2

CLASS III

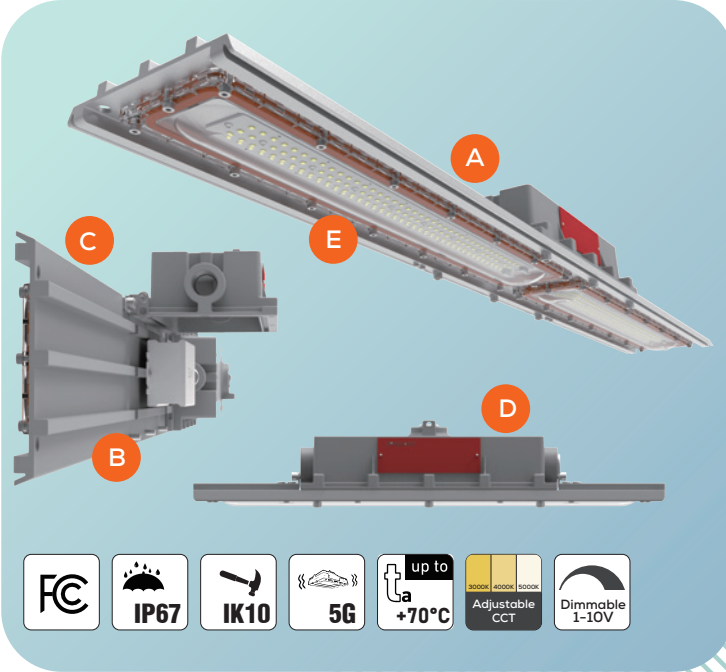

KEY FEATURES

- A LOW PROFILE AND LIGHTER.** 100mm fixture height, perfect for mounting in confined or low height areas.
- B RUGGED HEAT SINK.** Superior thermal heat sink design provides outstanding performance from -40°C to $+70^{\circ}\text{C}$ (-40°F to $+158^{\circ}\text{F}$) wide enough for any environment
- C SIMPLE INSTALLATION.** Clamshell design easy access to drivers and multiple entries standard for easy through wiring.
- D HIGH OUTPUT.** 2 models from 5,100 to 13,600 lumens with up to 170 lm/W.
- E MULTIPLE BEAM ANGLES.** 30° , 60° , 90° , 110° , T2, T3, T4, different lens provide more choices for various scenarios.

9 MOUNTING OPTIONS



Pendant



Ceiling




Swivel Bracket



Pole Clamp



Hanging



Wall 25° / 90°



Stanchion 25° / 90°

HAZARDOUS LOCATION LINEAR LIGHTING

CLASSIFICATIONS

NEC/CEC Standard

UL 844 Hazardous Locations
Class I Division 2, Group A, B, C, D
Class II Division 1, Group E, F, G
Class II Division 2, Group F, G
Class III
Class I, Zone 2, Group IIC

CSA C22.2 No.137
CSA C22.2 No.250.0
UL 1598 Wet Locations
UL 1598A Marine Outside Type (Salt Water)
UL 8750 LED Safety
ABS, FCC
IP66/67 | IK09 | 5G | NEMA 4X

TECHNICAL DATA

ELECTRICAL & OPTICAL

Rated Power	30W / 40W / 45W / 60W / 80W
Input Voltage	100-277, 347-480V/AC
Lumen Output	5,100lm ~ 13,600lm
Luminous Efficacy	170 lm/W
Beam Angle	30° / 60° / 90° / 110° / T2 / T3 / T4
Color Temperature	Amber 2700K 3000K 4000K 5000K
CRI	Ra>70

ENVIRONMENTAL & TECHNICAL

Ambient Temperature	-40°C ~ $+70^{\circ}\text{C}$
Lens Material	Polycarbonate
Mounting Options	Pendant / Ceiling / Wall mount / Stanchion / U-Bracket
Cable Entries	$3/4"$ NPT, $1-1/4"$ NPT, $1-1/2"$ NPT

OPTIONS AND WARRANTY

- Clear / diffuse polycarbonate lens
- CCT Adjustable (3000K / 4000K / 5000K)
- Safety cable
- 10kV surge protector is standard, 20kV is optional
- 1-10V dimming capabilities
- L70 > 150,000 operation hours @ 25°C
- 5-year limited system warranty